

KAYMAC BULK BINS ARE POLYURETHANE FOAMED USING ECO FRIENDLY CFC FREE FOAM FOR THERMAL INSULATION

BRANDING
optional molded in company branding

MOVING OF THE BULK-BIN
The Bulk-Bin has 2 way fork entry & is pallet jack compatible

DRAINAGE
Bulk-Bins come standard with a black jerry can cap. A black polyurethane rubber plug is also available with special orders, all of which ensure 99% drainage.

A

DIMETRIC ILLUSTRATION OF STANDARD BULK BIN

C

DIMETRIC ILLUSTRATION OF STANDARD BULK BIN WITH OPTIONAL LID

B


DETAIL A
STANDARD BLACK JERRY CAN CAP

OPTIONAL BLACK POLYURETHANE PLUG

DETAIL B
OPTIONAL BLACK POLYURETHANE PLUG INSERTED IN BULK-BIN

DRAINAGE CONFIGURATIONS
BOTH GOOD FOR 99% DRAINAGE

RECOMMENDED STACKING
THESE UNITS STACK 2 HIGH WHEN FULL AND 3 HIGH WHEN EMPTY

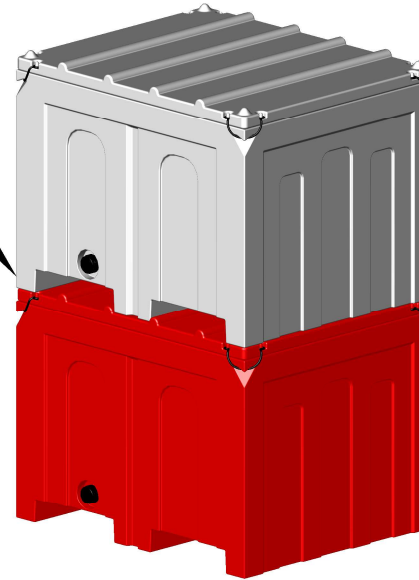

BULK BIN STACKING WITH OPTIONAL LID

RECOMMENDED STACKING
THESE UNITS STACK 2 HIGH WHEN FULL AND 3 HIGH WHEN EMPTY



BULK BIN STACKING OF STANDARD BULK BIN

OVER ALL DIMENSIONS

EXTERNAL DIMENSIONS

STANDARD EXTERNAL DIMENSIONS = 1005x 1220x 845
EXTERNAL DIMENSIONS WITH LID = 1005x 1220x 900

INTERNAL DIMENSIONS

STANDARD INTERNAL DIMENSIONS = 1135x 920x 700
(INTERNAL WALLS ARE DRAFTED AT 3°)

CAPACITY OF BULK-BIN

660L

CONTAINERIZATION

STANDARD BULK-BIN

40' HC CONTAINER FITS **54** UNITS
40' CONTAINER FITS **36** UNITS
20' CONTAINER FITS **16** UNITS

STANDARD BULK-BIN WITH LID

40' HC CONTAINER FITS **36** UNITS WITH LID
40' CONTAINER FITS **36** UNITS WITH LID
20' CONTAINER FITS **16** UNITS WITH LID




Kaymac Structural Foam

This drawing and the copyright therein is the property of Kaymac Structural Foam. It must not be copied or disclosed to a third party without their written consent

Drawn	D. Joubert	Material	MDPE, PU FOAMED
Date	22.02.06	Finish	-
Tolerance	± 1%	Colour	AS PER ORDER
Checked	C. BROWN	Shot mass	-
Approved	-	Trim. mass	-
Dwg. Scale	1:20	Paper Size	A3

Remarks: UNIT IS AVAILABLE UN FOAMED

Title Description : **BULK BIN SPECIFICATIONS**



Change Level : **A**
Sheet 1 of 1

Drawing No. : **CMO 205**